


RESIDENTIAL APRON AND SIDEWALK DETAIL

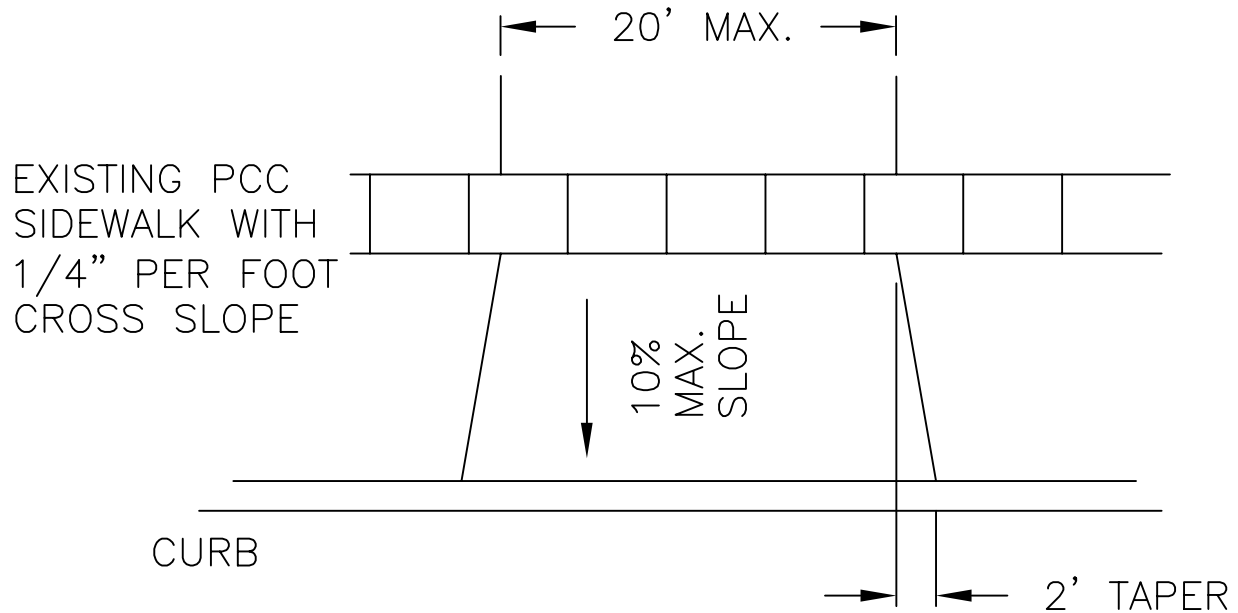

APRONS SHALL BE 2" ASPHALT OVER 6" STONE OR 5" CLASS SI NON-REINFORCED CONCRETE OVER 6" COMPACTED AGGREGATE BASE.

SIDEWALK SHALL BE 5" CLASS SI NON-REINFORCED CONCRETE (6" AT DRIVEWAYS) OVER 2" COMPACTED AGGREGATE SUB-BASE.

CONSTRUCTION JOINT TO BE 5' ON CENTER.
EXPANSION JOINTS TO BE 50' ON CENTER.

WIRE MESH, FIBER MESH, AND BARS ARE PROHIBITED IN
SIDEWALKS AND APRONS.

filename ac: Std Residential Apron and Sidewalk

REVISIONS:

1. 2/14/2025

3. 6/11/2026

2. 3/5/2026



Hanover Park ^{USA}

RESIDENTIAL APRON AND SIDEWALK
STANDARD DETAIL