



I certify that I have received a copy of these regulations and will comply with the regulations contained herein.

Name

Date

INSPECTIONAL
SERVICES DIVISION
630-823-5860

General Information

All habitable rooms shall have an aggregate glazing area of not less than 8% of the floor area of such rooms. Natural ventilation shall be through windows or other approved openings to the outdoor air. The minimum openable area to the outdoors shall be 4% of the floor area being ventilated. (IRC R303.1)

Safety glazing is required in all of the following locations: (IRC R308.4)

1. Fixed or operable glazing where the bottom edge is less than 18" above the floor
2. Glazing in swinging doors, including storm doors
3. Fixed or sliding panels of sliding glass doors
4. Fixed or operable glazing where the bottom edge of the glazing is less than 60" above the floor or walking surface, and:
 - a. Is within a 24" arc of the nearest vertical edge of a closed door, or
 - b. Encloses a bathtub, shower, pool, hot tub, spa, whirlpool, sauna, or steam room, or
 - c. Within 36" horizontally of a stairway, landing or ramp

All new windows shall have a U-factor less than or equal to 0.30 (IECC R402.3.1)

Do not remove manufacturer's label indicating U-factor until after final inspection.

Windows shall be anchored in accordance with the published manufacturer's recommendations to achieve the design pressure specified. (IRC R612.8)

Bars, grills, screens or other obstructions placed over emergency escape windows shall be releasable or removable from the inside without the use of a key or a tool.

The responsibility for full compliance with State, County and Local adopted codes, Standards and/or Regulations rests with the developer or his authorized agent or sub-contractor. Subsequent discovery of errors in this handout shall not be construed as



Hanover Park ^{USA}

2121 Lake Street, Hanover Park, IL 60133

Phone: 630-823-5860, Fax: 630-823-5782, Web: www.hpil.org

VILLAGE OF HANOVER PARK
WINDOWS



UPDATED MAY 2018



Village of Hanover Park

INSPECTIONAL SERVICES DIVISION
630-823-5860

Emergency Escape & Rescue Openings

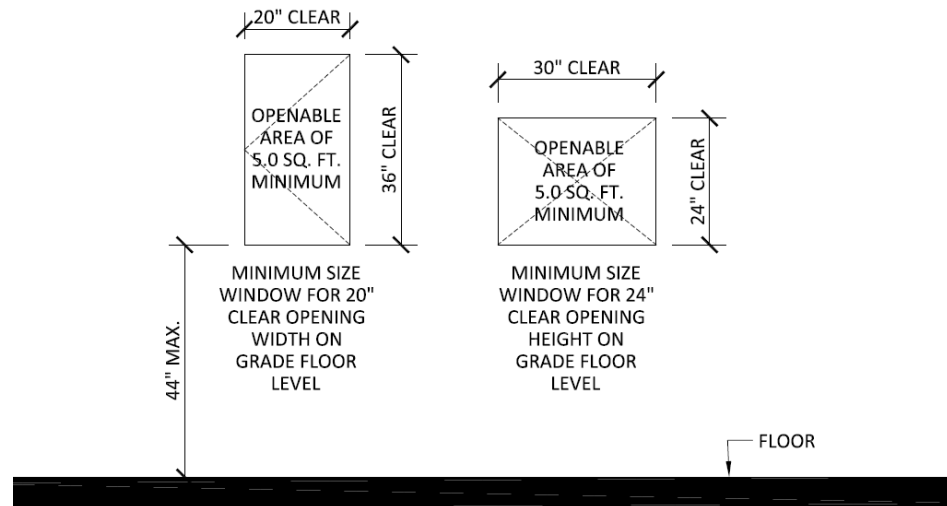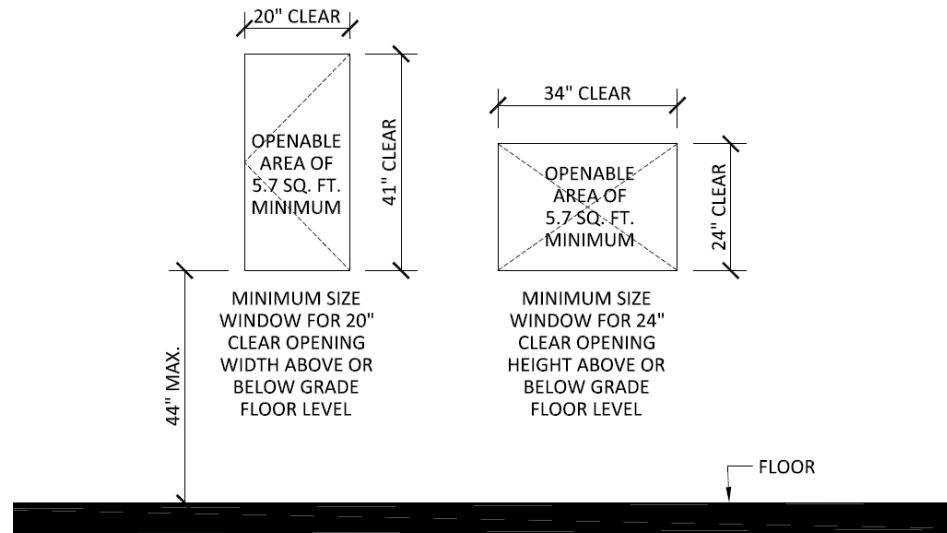

NOTE: WINDOW WELLS SHALL HAVE A MINIMUM HORIZONTAL AREA OF 9 SQ. FT. WITH A MINIMUM HORIZONTAL PROJECTION AND WIDTH OF 36"



2121 Lake Street, Hanover Park, IL 60133
Phone: 630-823-5860, Fax: 630-823-5782, Web: www.hpil.org

VILLAGE OF HANOVER PARK
WINDOWS

UPDATED MAY 2018



Village of Hanover Park

INSPECTIONAL
SERVICES DIVISION
630-823-5860

Window Information

Please fill in the information below for each window being replaced.

Window	U-Factor	Size	Type	Location In Home (include floor level)
<i>Example</i>	<i>.30</i>	<i>20x24</i>	<i>Slider</i>	<i>Bedroom</i>
Window 1				
Window 2				
Window 3				
Window 4				
Window 5				
Window 6				
Window 7				
Window 8				
Window 9				
Window 10				



2121 Lake Street, Hanover Park, IL 60133
Phone: 630-823-5860, Fax: 630-823-5782, Web: www.hpil.org

VILLAGE OF HANOVER PARK
WINDOWS